

MODULAR TRAINING WEAPON OWNER'S MANUAL



WOLVERINE AIRSOFT

www.wolverineairsoft.com

Table of Contents

Important Safety Information	3
Getting to Know your MTW	4
Getting Started	5
General Use	7
Maintenance	9
Dente	1/1

Don't Forget to Register Your Warranty!

Your MTW is backed by Wolverine Airsoft's limited warranty. Scan the QR code or visit www.wolverineairsoft.com/warranty to read our full warranty and register your MTW.



Important Safety Information



Always wear safety goggles when using your Airsoft gun. Portez tojours des lunettes de protection lorrsque vous utilisez votre replique. Utilise siempre gafas protectoras cuando emplee su replica.



Do not look directly into the gun barrel. Ne regardez pas directement dans le canon de votre replique. No mire directamente hacia el canon de las replica.



Never aim or shoot at people or animals. Always set the selector on "safe" positiom (except when you are ready to shoot a target). Ne visez et ne tirez jamais sur une personne ou un animal. Veuillez regier le selecteur sur la position securite (excepte lorsque vous etes pret a tirer sur votre cible. Nunca apunte o sispare hacia personas o animales. Mantenga siempre el seguro en las posicion "safe" hasta que este listo para disparar la blanco.



Belect a safe place for operating the Airsoft gun. Avoid shooting in public places. Choisiesez un endroit sur pour utiliser votre replique a billes, evitez les endroits publics. Escoja un lugar segura para disparar la replica. Evite lugares publicos.



Never shoot holding the Airsoft gun side-ways as the BB pellets will curve [this is due to the hop-up system]. Ne tenez jamais is replique de travers. Les billes puevent partir a droite ou gauche. [Cela est du au system de Hop-up]. Jamas agarrar y disparar la replica horizontaimente, por el sistema hop-up los proyectiles BB podran cambiar de direccion en el aire.



Do not disassemble gun yourself. Always contact your local retailer. Ne jameis demonter ou modifier votre repidue. Veuillez conacter votre revendeur d'air-soft pour toute question. No desarme la require usted mismo. Pongase siempre en concecto con el revendedor local.

Proper handling of your replica is critical to the safety and well being of yourself and those around you. When in doubt follow the Four Rules of Gun Safety:

- 1. Always treat every gun as if it was loaded.
- 2. Never point a gun at something you are not willing to destroy.
- 3. Keep your finger off the trigger until you have the weapon pointed at your target and are ready to shoot.

 4. Be aware of the backdrop of your target. [i.e. what is behind your target in case you miss or the projectile over-penetrates].

Every day our rights continue to be restricted because people are irresponsible and abuse them. Please be part of the solution, not the problem. Learn your local laws, how your equipment works, how to use it safely, and always exercise responsibility.

Always treat the airsoft gun as if it were loaded. Do not carry the airsoft gun in open view. Always transport the airsoft gun unloaded in a locked case. Do not openly brandish the airsoft gun, as this may be perceived by others [including law enforcement units] as a threat, and cause prompt reaction. Always use precision 6mm BBs for this airsoft gun. Never use any used or damaged BBs.

Manipulez toujours votre réplique commet si elle était chargée. Ne pas porter cette réplique sur vous en public. Transportez toujours la réplique déchargée, dans une mallette verrouillée, pas ouvertement brandir votre réplique, car céla paut être perCu par d'autres (y compris les unités de police) comme une menace, et provoquer des troubles à l'ordre public. Veuillez toujours utiliser des billes de précision a vec votre réplique à billes effam. N'utilisez iamais de billes déja utilisées.

Siempre trate la réplica como si estruiera cargada. No lleve la réplica en viste pública. Transporce la réplica descargada, en una funda cerrada. No blandir la réplica abientamente, ya que esto puede sen percibido por otras perssons (incluso unidades de la policia) como una amenaza, y provocar una reacción instantánea. Utilica esiempre BBs Emm para su réplica. Nunca utilica BBs disparados o dañados.

Getting to Know your MTW

Your Wolverine Airsoft MTW is a precise instrument containing many individual components. Before you begin, please see the diagram below and familiarize yourself with each component. Your MTW may come with different components than picture below depending on the series and trim level.




Getting Started

Before using your MTW, you will need to assemble it with a few additional items not included.

Items You will need

- 7.4 LiPo battery which will fit inside the MTW buffer tube. Most batteries
 in the 250-500 mAh range will work. [The MTW Milspec Series with Reaper M does not require a battery].
- Charged HPA tank [Always carefully follow the tank manufacturer's instructions when filing and using HPA tanks. They are very safe when used properly, but when misused or abused, they can cause serious injury or death.
- STORM Regulator or other airsoft regulator in the 60-140 PSI range.
- Air line with Foster spec fittings (standard in US airsoft market)

Pull the 2-Pin JST RCY connector out from the buffer tube and connect the battery. Note that the battery will always draw current when connected, so the MTW should not be stored with the battery connected.



Insert the battery fully into the buffer tube. The braided line should lay to the left side of the control board wire guide. On the Forged Series, the Premium FCU should also be inserted into the buffer tube.



IMPORTANT!!!

Your MTW contains steel components and is susceptible to surface rusting when exposed to moisture. If your MTW is exposed to liquids, be sure to dry it thoroughly and clean the surface with a silicone-based oil.

Completely extend the body pins on the lower receiver. Note that the pins on a new MTW can be stiff and you may find it easier to do this using a non-marring punch such as the backside of a plastic handled screwdriver to get the pin started.



Attach the upper and lower receivers by lining up the front lugs and pushing the body pin all the way through. Insert the air line through the lower receiver and pistol grip. Finally, close the upper and lower receivers and push in the rear body pin, ensuring the braided wire is not pinched in the process.



Load the magazine and insert it into the lower receiver. We recommend 0.28g or higher BBs. Then, **press the bolt catch** to reset the automatic empty magazine detection and enable firing.



Mount your regulator to your tank and set the pressure to 100 PSI [see manufacturer's instructions]. Connect the tank air line by pulling down on the collar of the Foster fitting and pushing the male fitting into the female.



General Use

Stock Adjustment/ Removal

The stock can be adjusted to a comfortable length by squeezing the adjustment arm and sliding the stock along the buffer tube.



To remove the stock, firmly grasp the adjustment arm and pull it downward until the stock slides freely from the buffer tube.



Premium Stock Removal

If your MTW came with the DLG tactical stock, it can be removed by squeezing the adjustment arm hard enough so that it clicks twice.



Mode Select

The selector switch can be used to toggle your MTW between three firing modes: Safe, Select-Fire and Full Auto. [Note: Full-Auto mode is not available in the Milspec Series as well as some MTWs sold in certain countries.]



Hop-Up Adjustment

The amount of hop-up can be adjustment with the adjustment wheel accessible through the ejection port on the MTW's right side. Rotating the wheel clockwise will increase the amount of hop-up.



Press the mag release button on the MTW's right side to eject a magazine. The MTW is designed for use with proprietary Wolverine Airsoft magazines with **Empty Mag Detection [EMD]**.

Note: Using third-party magazines will disable EMD entirely.

When a magazine is emptied, the EMD activation lever will make contact with the control board and prevent firing.

EMD Traditional Mode


After inserting a new magazine, press the bolt catch on the MTW's left side to reset the empty mag detection and allow fining again.

EMD Simplified Mode

In this mode, firing will be enabled automatically when your new magzine is inserted with no need to press the bolt catch.

EMD Mode Toggling

For MTWs with Spartan Electronics [Billet Series, MTW-9], you can switch between EMD modes by holding the bolt catch and trigger for 5 seconds. This feature is not available on MTWs with the Premium FCU [Forged Series].



MTW N. S.

MTW











Maintenance

Engine/Hop-Up Removal

Remove the front and rear body pins and separate the upper and lower receiver and disconnect the battery. Use a hard tool like an allen wrench to carefully lever the feed tube assembly out of the upper receiver.



Gently pull straight up on the gripline to pull the contact yoke out of place. Then, use a hard tool like an allen wrench to pull the contact yoke connector pin out of the engine.





Feed the end of the gripline into the upper receiver and out the rear. Pull the airline straight out. It will bend sharply during this process but it will not be damaged.



Finally, use the airline to pull the engine out of the receiver. You can also pull the hop-up and barrel assembly out at this point.



Control Board/Trigger Board Removal

Remove the front and rear body pins and separate the upper and lower receiver and disconnect the battery. Use a hard tool like an allen wrench to slide the trigger spring away from the control board/trigger board and relieve tension on the front trigger pin.

Use the allen wrench to push the front trigger pin through the receiver and then pull it completely out.





Then, pull the control board/trigger board straight up from the receiver.



Trigger Adjustment

The amount of travel between the trigger and trigger switch can be adjusted with the trigger adjustment screw and a 1.5mm hex wrench.



With the board removed and the selector switch in the SAFE position, rotate the adjustment screw clockwise to decrease travel and counter-clockwise to increase travel. When using a board with optical sensor, be sure not to damage the paint marks or stickers on the selector barrel.



Optional Receiver Tension Screw

MTW's manufactured after March 1, 2022 include an optional nylon screw and hole in the lower receiver. If you want a tighter fit of the upper and lower receivers, it can be installed with a 1/8" allen wrench and adjusted to add tension to the upper receiver rear lug. You will have to install your battery in the grip when using the screw.



Additional Documentation

Electronics

For help with tuning and adjusting settings available to your MTW, please see the particular owner's manual for your electronics at http://www.wolverineairsoft.com/documentation

Billet/MTW-9



Spartan Electronics

Forged



Engine

For help with maintaining your HPA engine, please see the particular owner's manual for your engine at http://www.wolverineairsoft.com/documentation

Billet/MTW-9 Forged

INFERNO

Milspec



REAPER M

Hop-Up

For help with maintaining your hopup, please see the particular owner's manual for your hop-up at http:// www.wolverineairsoft.com/documentation/

Most MTWs

MTW Poly/ CNC Hop-Up

Forged/Milsec through 2021





PHOENIX Hop


Guides, Videos and More...


You can find owner's manuals, maintenance guides, installation videos and more in the Knowledgebase at http://www.wolverineairsoft.com/knowledgebase.



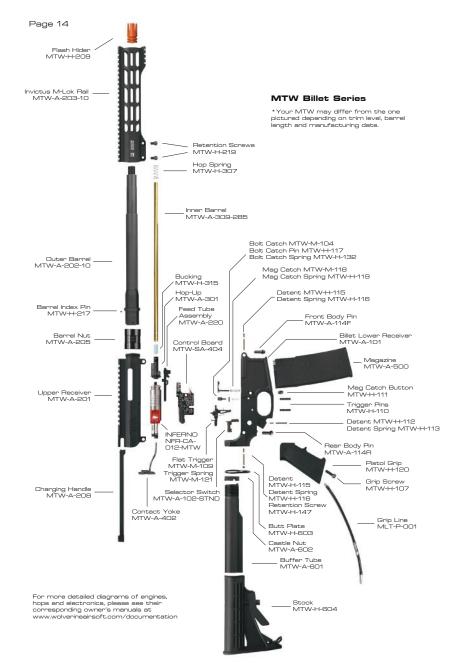

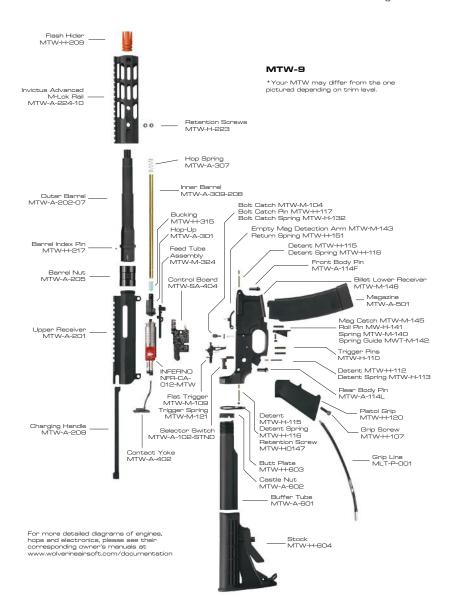

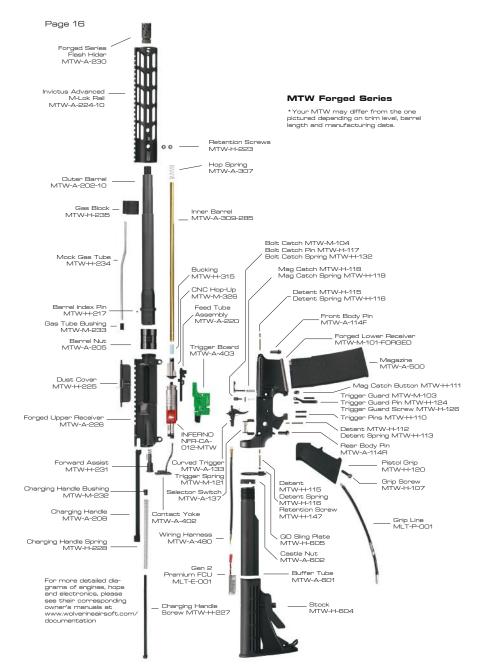

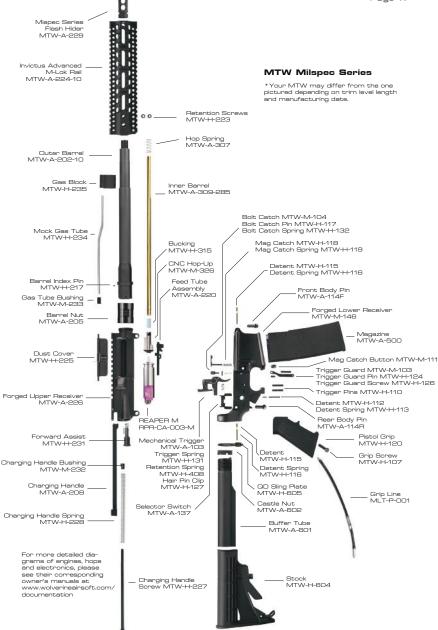

Need professional help?

To find a retailer close to you visit: www.wolverineairsoft.com/dealers



www.wolverineairsoft.com